



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## LOUIS REYNERS BV

Founded in 1892, 125 years successful in the better brands. With all that experience and knowledge, Louis Reyners is definitely the specialist in Hoisting, Lifting and Fall Protection. As an importer/wholesaler in the Industry & Entertainment segments, our products are delivered to specialized retailers, rental companies and other resellers.

Louis Reyners is active in almost 30 countries.

## ELLER SINCE 2003

There was a demand for a reliable range of hoisting products at a competitive price on the market. To meet this demand, in 2003 a start was made to launch lifting and hoisting products under the brand ELLER. This reliable range had gradually been expanded with straps (ELLERstrap) and slings (ELLERSling). In 2008, the addition of Personal Fall Protection (ELLERSafe) follows. With the latest extension in 2013, chains & components under the brand BLP (Best Lifting Products), the line of products in Hoisting, Lifting and Fall Protection is complete.

## PRODUCTS IN STOCK

Louis Reyners has more than 1.500 house brand items in stock, ready to be delivered and can measure up to the more well-known en often more expensive A-brands.

## ASSORTMENT ELLER(SAFE)

From hand chain hoists to shop cranes. Check out the next page to see the line of ELLER products. Turn the catalog around and see our assortment of ELLERSafe personal fall protection.

## QUALITY - ISO

We strive for quality and look to improve our products where necessary. Louis Reyners is the first company in the hoisting and lifting industry that has an ISO 9001:2015 certificate! Our focus is on reliability of our products and the wishes of our customers.

## PRIVATE LABEL / CUSTOM MADE WORK

Due to our years of experience, we always find a product that is suitable for your application. If this does not work with a standard product, we also do custom made work and tailor the product to your specific requirements. ELLER products with your own name or logo? Contact us about the possibilities.

## INSPECT / REPAIR / CERTIFY

We have certified inspectors and an experienced team of workshop staff who can repair, modify, inspect, approve and certify for you.

## TECHNICAL SUPPORT / PRODUCT TRAINING

Our product specialists and sales consultants are available daily to answer all your questions quickly and professionally. Do you need training for yourself or for your employees? We can provide a training that will fit your needs.

## SALES / MARKETING SUPPORT

You have 24/7 access to the LR customer portal. You can order online, view your net purchase prices and our stock as well as your invoice and order history. Easily download your certificates, manuals, images, folders and documents. Folders or documents with your name or logo? Support during an exhibition? Our employees are ready to help.

## DEALERS / RESELLERS

The ELLER products are available from our dealers or resellers. Inquire about the correct addresses via one of our employees or via [www.lr.nl](http://www.lr.nl).

Want to be an ELLER-dealer? Please let us know by contacting one of our employees.

## (DROP)SHIPMENT

In most cases, we will ship your order on the same day. If desired we can work with time slots. Sending orders neutral packed and/or with your own packing list? No problem, we are happy to assist you.

## CONTACT OR MORE INFORMATION?

Louis Reyners BV

 Symon Spiersweg 13a

1506 RZ Zaandam - The Netherlands

 +31 (0)75 650 47 50  +31 (0)75 650 47 60

 info@lr.nl  www.lr.nl



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**INSPECTION**

Requirements for the purchase and use, user training and the inspection of lifting equipment are in various sections of the Labor Decree, the labour regulations, the Goods Act and machinery regulations. Although all lifting equipment that is supplied must at least meet the safety requirements, you will need to take measures to work safely with the appropriate lifting equipment before use (Health and Safety regulation). This includes reading the instructions, training the users and inspection of the equipment. When equipment is used, it may be necessary to establish a (new or additional) risk assessment. In addition, proper maintenance, regular checks and inspection of equipment is necessary.

On our website [www.ir.nl](http://www.ir.nl), under Downloads, you can download the necessary inspection information and inspection periods per product group.

**STANDARDS**

NEN-EN standards provide further elaboration of requirements from European directives such as the Machinery Directive. When a European Standard has been published in the Official Journal of the European Union, then this standard is recognized as such and it is assumed that the machinery or safety components are built according to this standard with the relevant basic requirements of the directive. Wherever possible and applicable, we have listed the NEN EN standard(s) for our hoisting and lifting tools.

**QUESTIONS OR MORE INFORMATION ABOUT STANDARDS AND INSPECTION?**

We have inspectors and an experienced team of workshop staff who can help you repair, modify, inspect, approve and certify. Our sales team is happy to advise you.

You can read more in the Machinery Directive 2006/42/EG.

	<b>PAGE</b>
<b>1 LIFTING EQUIPMENT</b> - Manual chain hoists - Lever hoists - Beam clamps & trolleys - Wire rope pulling hoist	3 6 9 15
<b>2 WEBBING, ROUND SLINGS &amp; LOAD BINDERS</b> - Webbing slings & round slings - Buckle straps & ratchet lashings - Load binders	16 21 23
<b>3 LIFTING POINTS &amp; CHAIN SLINGS</b> - BLP working load table - BLP chain & components	24 25
<b>4 MATERIAL HANDLING</b> - Pallet trucks - Rack Jacks - Hydraulic jacks - Jacks	31 33 34 35
<b>5 WORKSHOP EQUIPMENT</b> - Shop cranes - Gantry cranes; see page 53 ELLERsAFE side - Aluminium lifting beam; see page 58 ELLERsAFE side	37
<b>TERMS OF SALE AND DELIVERY</b>	38



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVÁ 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLER® PH3 HAND CHAIN HOIST, WITH OVERLOAD PROTECTION


The ELLER® PH3 is a consistent development of the successful hand hoist ELLER® PH2. Available from 0.25t up to 30t, with standard overload protection starting from 0.5t.

### FEATURES:


- The chrome-plated housing has an orange electrophoresis coating (minimum thickness 80µm);
- High-quality precision fit load sheave with a closed ball bearing;
- The Dacromet® chain stripper, end anchor, chain guide, spacers and stainless steel nuts provide higher protection against all weather effects;
- Forged carrying and load hooks, with Dacromet® coating, made of heat-treated, tempered steel. Cast hooks clips that are galvanized and spring-loaded prevent lifting gear slipping;
- The ELPH3 is equipped with a reliable disc brake that holds the load in any position after the lifting process is complete; load pressure brake with two brake pads with stainless steel springs;
- Tempered and galvanized load chain, Grade 80 according to EN-818-7;
- Standard lifting height 3m;
- Hand chain: 5 x 25mm.

### OPTIONAL:

- Chain bag;
- Stainless steel chain;
- Other lifting heights and colours available upon request;
- ELLER® PH2 is available in black, from stock.

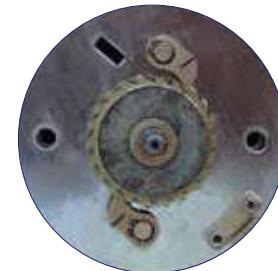

Double brake pawl with stainless steel spring

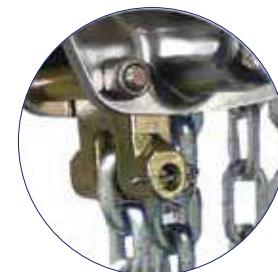

Robust end stop



Dacromet® chain guide



High quality spur gears



Load sheave with closed ballbearing



Casted clip with Dacromet® coating and stainless steel bolt and nut




A compact 30t PH3



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: +420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



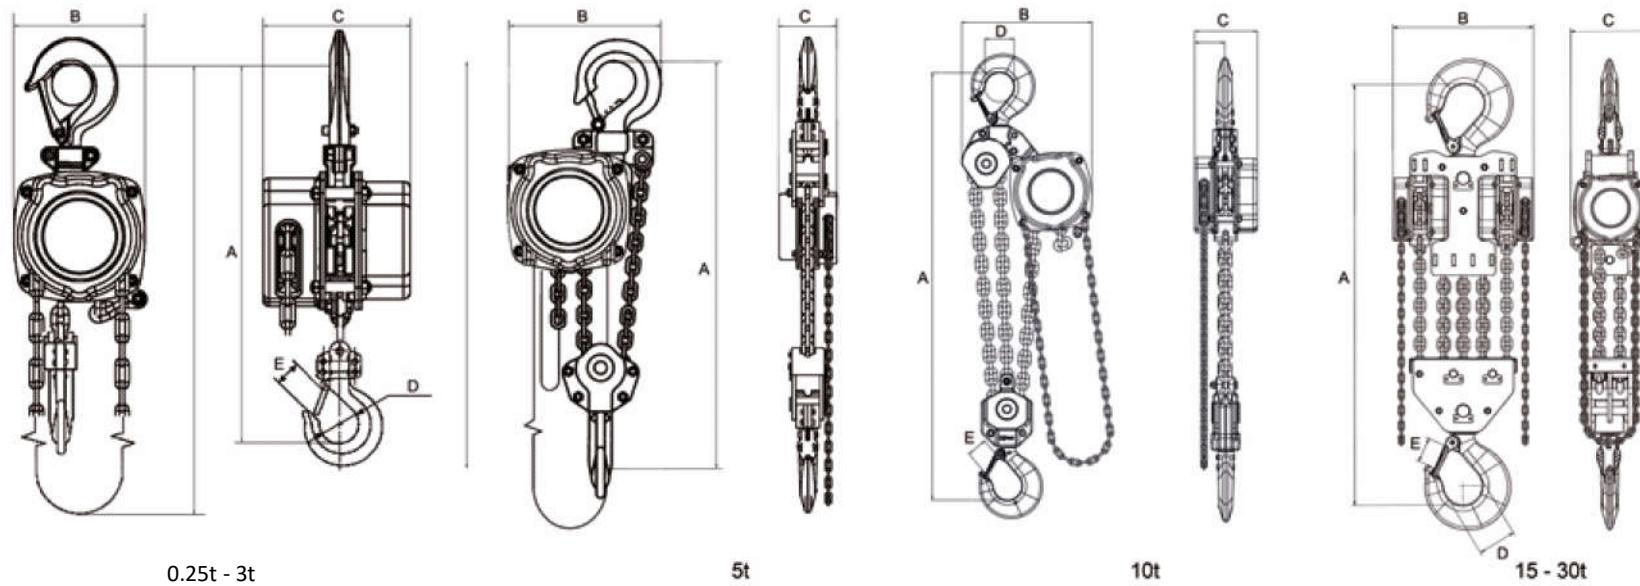

Product code	WLL (t)	Chain Ø (mm) x number of falls	Headroom (A) (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Pulling force (daN)	Weight (kg)
ELPH3-00250-030-025	0.25	4 x 1	259	95	100	30	22	21.6	4
ELPH3-00500-030-025	0.5	5 x 1	309	114	110	33	22	23.5	6
ELPH3-01000-030-025	1.0	6 x 1	373	152	139	40	28	30.4	11
ELPH3-01500-030-025	1.5	8 x 1	460	190	150	52	33	35.3	17
ELPH3-02000-030-025	2.0	8 x 1	460	190	150	52	33	35.3	17
ELPH3-03000-030-025	3.0	10 x 1	553	240	158	62	37	36.3	26
ELPH3-05000-030-025	5.0	10 x 2	630	240	158	72	44	38.3	40
ELPH3-10000-030-025*	10.0	10 x 3	900	391	166	85	60	39.2	62
ELPH3-15000-030-025	15.0	10 x 6	1030	437	158	115	89	39.2 (2x)	197
ELPH3-20000-030-025	20.0	10 x 8	1033	437	158	110	70	40.2 (2x)	234
ELPH3-30000-030-025	30.0	10 x 12	1320	533	220	106	80	46.1 (2x)	350

\* Grade 100 chain



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLER® PHE1 HAND CHAIN HOIST, ECONOMY LINE


A completely new line of economy hand chain hoists, the PHE1, without OLP. Solid and robust for when you need it quick and easy. PHE1 hoists are good quality hoists for a competitive price.

### FEATURES:

- 0.5 - 5t;
- Load chain, black, grade 80 (T), according to EN 818-7;
- Good value for money;
- Hand chain: 5 x 24mm.

### OPTIONS:

- Chain bag;
- Other lifting heights and colours available upon request;
- The WLL 0.5t and 1t are also available in black, from stock.

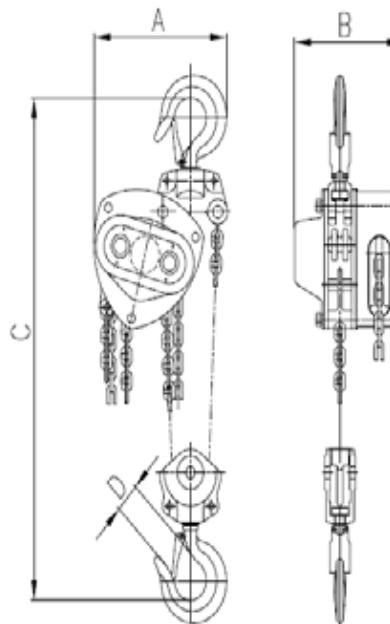

Product code	WLL (t)	Colour	Chain Ø (mm) x number of falls	Headroom (C) (mm)	A (mm)	B (mm)	D (mm)	Pulling force (daN)	Weight (kg)
ELPHE1-00500-030-025	0.5	Blue	5 x 1	285	120	116	28	25.5	8
ELPHE1-01000-030-025	1.0	Blue	6 x 1	332	147	136	32	31.4	12
ELPHE1-02000-030-025	2.0	Blue	6 x 2	455	147	136	40	32.4	16
ELPHE1-03000-030-025	3.0	Blue	7.1 x 2	530	181	147	45	39.2	22
ELPHE1-05000-030-025	5.0	Blue	10 x 2	620	224	177	50	42.2	37

## ELLER® PRM MINI LEVER HOIST

De ELLER® mini lever hoist, type PRM, is available in 0.25t en 0.5t.


Because of it's compact size and light weight the ELLER® PRM is the perfect tool for all kinds of assembly works. Can be used for lifting and pulling.

### FEATURES:

- Equipped with double brake pawl;
- Aluminum alloy housing;
- Short handle with rubber grip;
- European Grade 80 galvanized load chain according to EN 818-7;
- Chain bag included;
- Standard lifting height 1.5m.

### OPTIONAL:

- Other lifting heights and colours available upon request.

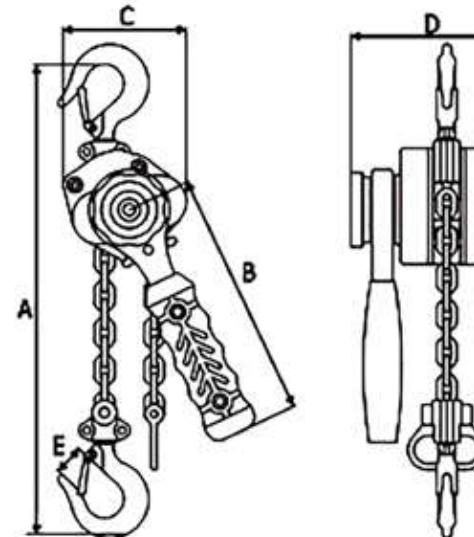

Product code	WLL (t)	Standard lifting height (m)	Chain Ø (mm) x number of falls	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Weight (kg)
ELPRM-0250-015	0.25	1.5	4 x 1	250	160	81	100	24.5	2.2
ELPRM-0500-015	0.5	1.5	4 x 1	260	160	81	100	30	2.3



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLER® PR3 LEVER HOIST, WITH OVERLOAD PROTECTION


The improved design of the reliable ELLER® PR2. This design makes it very robust. The proven quality ensures a long lifetime use.

### FEATURES:

- Working load limits up to 9.6t;
- The lever has an anti-skid handle and extra secured with bolt;
- The Dacromet® chain stripper, end anchor, chain guide, spacers and stainless steel nuts provide higher protection against all weather effects;
- Galvanized chain guides leads the load chain properly into the sprocket wheel without jamming and sticking;
- Hooks fitted with stainless steel safety latch;
- With robust chain end piece for extra safety;
- When put into neutral position, the chain can easily be pulled into any desired position;
- European Grade 80 galvanized load chain according to EN 818-7;
- With minimum 80µm electrophoresis coating;
- Standard with overload protection (OLP);
- Standard lifting height 1.5m.

### OPTIONAL:

- 1.5t and 3t also with ship yards hooks;
- With flexible end stop;
- Other lifting heights and colours available upon request.

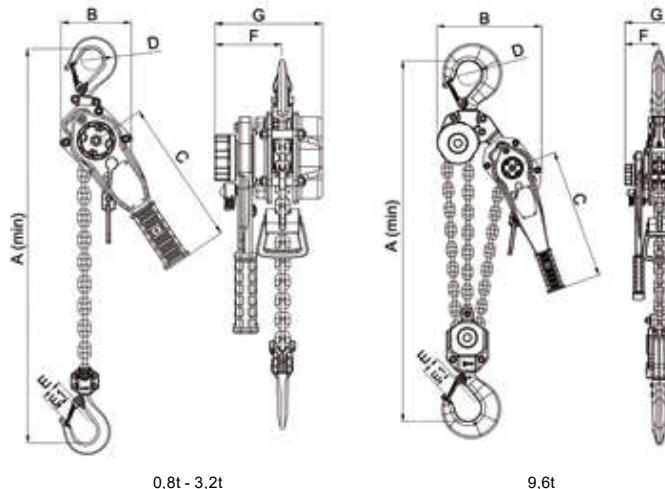

Product code	WLL (t)	Standard lifting height (m)	Chain Ø (mm) x number of falls	Headroom (mm)	Pulling force (daN)	B (mm)	C (mm)	D (mm)	E (mm)	E1 (mm)	F (mm)	G (mm)	Weight (kg)
ELPR3-0800-015	0.8	1.5	5.6 x 1	320	22	115	239	35	35	23	91	146	5.3
ELPR3-1600-015	1.6	1.5	7.1 x 1	360	24	137	259	42	38	28	67	162	8.6
ELPR3-3200-015	3.2	1.5	9 x 1	431	33	169	374	48	46	33	98	187	15.2
ELPR3-6400-015	6.4	1.5	9 x 2	500	36	238	374	60	59	39	98	187	23.0
ELPR3-9600-015	9.6	1.5	9 x 3	635	38	300	374	70	54	51	98	187	43.0



## ELLER® PRE1 LEVER HOIST, ECONOMY LINE


The new ELLER® robust quality hoists at a competitive price;

### FEATURES:

- Excellent value for money;
- Load chain, black, grade 80 (T), according to EN 818-7;
- Swivel top and bottom hooks, with safety latch;
- Free-wheeling;
- Standard lifting height 1.5m.

### OPTIONAL:

- Other lifting heights and colours available upon request.

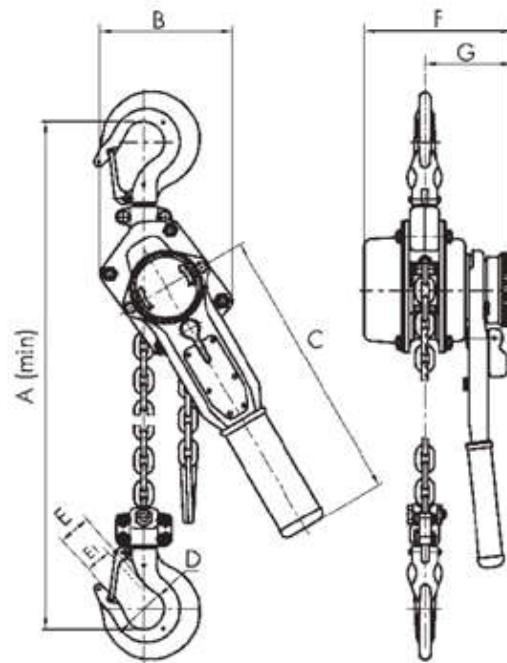

Product code	WLL (t)	Lifting height (m)	Chain Ø (mm) x number of falls	Headroom (mm)	Pulling force (kg)	B (mm)	C (mm)	D (mm)	E (mm)	E1 (mm)	F (mm)	G (mm)	Weight (kg)
ELPRE1-0750-015	0.75	1.5	6 x 1	340	19.6	135	296	37	23.7	18.9	90	150	6.5
ELPRE1-1500-015	1.50	1.5	7.1 x 1	360	25.5	160	420	37	31.6	27.2	98	170	10.0
ELPRE1-3000-015	3.00	1.5	10 x 1	480	37.3	210	420	47	35.3	30.8	105	190	18.5



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511




## ELLER® BEAM CLAMP WITH SHACKLE

The ELLER® ELBCH fixed jaw super clamp is fitted with a 'gusset' in both jaws of the beam clamp maximising contact between the beam and beam clamp increasing the grip of the beam clamp. A shackle is fitted to the bottom of the beam clamp allowing an easy connection of the hoist to be attached.

The fixed jaw super clamp can be used at an angle of 45° to the vertical. When the angle is moved away from the vertical the WLL of the beam clamp needs to be reduced.

### FEATURES:

- Robust construction, frame is made from solid steel plate and a galvanized spindle;
- Adjustable to 45° (except 2t), see table for reduction factor;
- Black version.

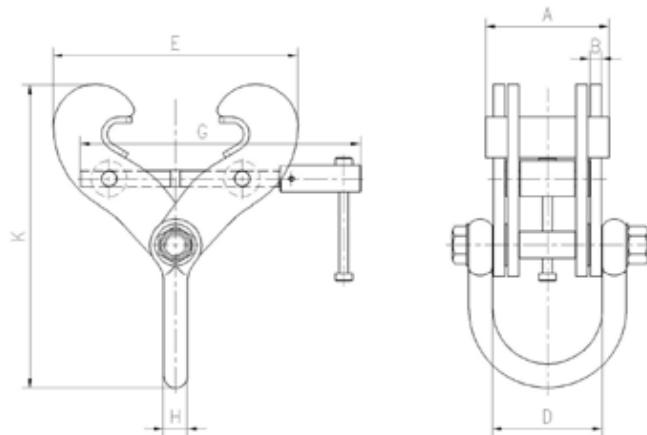

Product code	WLL (t)	Beam flange width A (mm)	Headroom F (mm)	Ø Suspension bolt H (mm)	0° - 15° (17%)	Reduced WLL (t)	Weight (kg)
					15° - 30° (34%)	30° - 45° (50%)	
ELBCH020	2	76 - 190	223 - 263	20	-	Not allowed	4.0
ELBCH030	3	76 - 190	251 - 289	20	2.5	2	8.0
ELBCH030-L	3	127 - 350	294 - 375	20	2.5	2	11.5
ELBCH050	5	76 - 290	300 - 338	25	4.1	3.3	10.0
ELBCH050-L	5	150 - 305	360 - 413	25	4.1	3.3	15.0
ELBCH100	10	203 - 350	421 - 530	32	8.3	6.5	28.0
ELBCH150	15	203 - 457	608 - 684	40	12.4	10	49.5
ELBCH150-L	15	406 - 610	706 - 816	40	12.4	10	58.5




## ELLER® BEAM CLAMP

The ELLER® beam clamp is a simple and safe temporary anchor point. Ideal for quick attachment of loads using threaded spindle. The clamp can be installed withing a few simple steps, just twist and open the spindle, place over the flange and close tightly.

### FEATURES:

- Robust construction, frame is made from solid steel plate and a galvanized spindle;
- Low headroom, wide flange width adjustment range, therefore ideal in many situations;
- Black version.

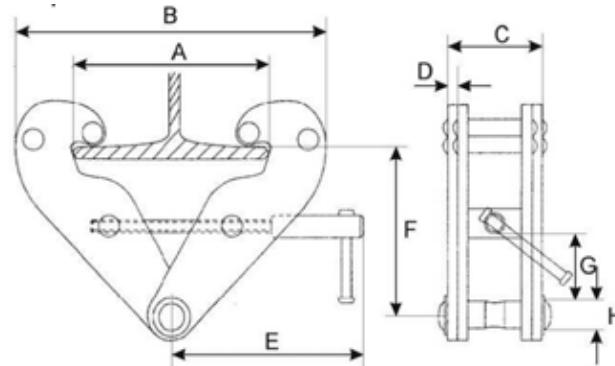

Product code	WLL (t)	Beam flange width A (mm)	Headroom F (mm)	Suspension bolt H (mm)	Weight (kg)
ELBC010	1	75 - 230	102 - 160	20	3.0
ELBC020	2	75 - 230	102 - 160	22	4.7
ELBC030	3	80 - 322	168 - 240	24	9.2
ELBC050	5	90 - 322	168 - 240	30	11.0
ELBC100	10	90 - 322	172 - 242	40	17.5


## ELLER® SPINDLE PUSH TROLLEY

The ELLER® spindle push trolley type TC for quick and easy assembly of a temporary lifting point. This robust push trolley is available in WLL 1, 2, 3 and 5t.



### FEATURES:

- Quick mounting because of the screw spindle;
- Secured by means of locking lever;
- Galvanized spindle and forks for better corrosion protection;
- Safety factor 5:1.

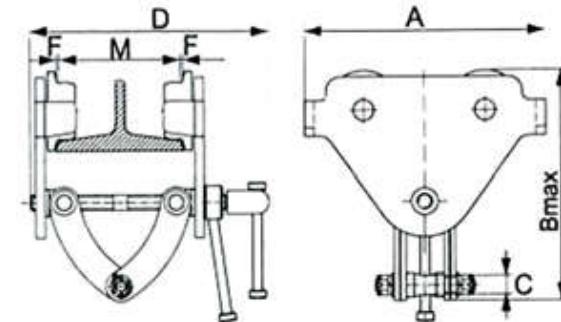

Product code	WLL (t)	Beam width (mm)	A (mm)	Bmax (mm)	C (mm)	D (mm)	F (mm)
ELTC10-A	1	64 - 203	260	256	20	325	~3
ELTC20-A	2	76 - 203	260	305	20	340	~3
ELTC30-A	3	76 - 203	345	311	22	345	~3
ELTC50-A	5	100 - 305	395	393	28	365	~3



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY


EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLER® PTS SPINDLE PUSH TROLLEY

### FEATURES:

- Quick and precise beam adjustment using the opposite lead threaded load bar;
- High flexible as the trolley is adjustable to fit a wide range of beam widths and profiles, A - small version, B - widest version;
- Standard anti-tilt and wheel fracture support;
- Centralized suspension point;
- When suspended, the width setting is blocked;
- Low headroom;
- Easy mounting to beam.

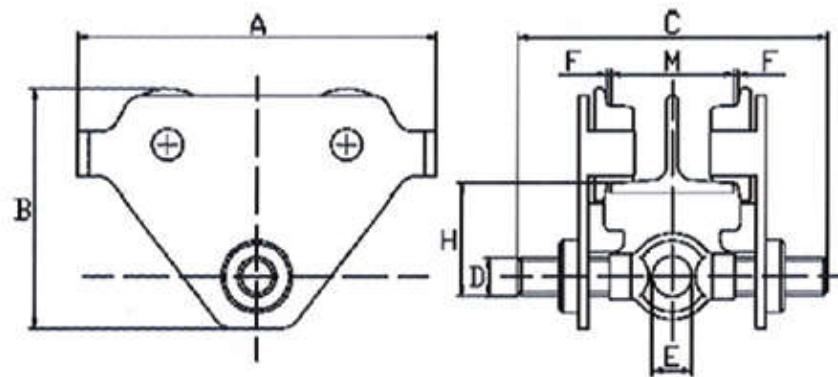

Product code	WLL (t)	Adjustable for beam width (mm)	Min. radius (m)	A (mm)	B (mm)	C (PTS-A) (mm)	C (PTS-B) (mm)	D (mm)	E (mm)	H (mm)	F (mm)	Weight (kg)
ELPTS05-A	0.5	55 - 220	1.1	260	185	292	377	30	25	77	3	8.3
ELPTS05-B	0.5	160 - 305	1.1	260	185	292	377	30	25	77	3	8.7
ELPTS10-A	1.0	58 - 220	1.1	260	188	300	385	35	30	83	3	10.9
ELPTS10-B	1.0	160 - 305	1.1	260	188	300	385	35	30	83	3	11.4
ELPTS20-A	2.0	66 - 220	1.3	310	218	310	395	47	40	99	3	18.2
ELPTS20-B	2.0	160 - 305	1.3	310	218	310	395	47	40	99	3	19.0
ELPTS30-A	3.0	74 - 220	1.5	390	273	324	409	58	48	114	3	31.4
ELPTS30-B	3.0	160 - 305	1.5	390	273	324	409	58	48	114	3	32.5



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**ELLER® PT AND GT TROLLEY**


The ELLER® push trolley PT and geared trolley GT.

**FEATURES:**

- Adjustable for various beam widths and profiles by changing the spacers;
- Trolley can be installed at any point along the track;
- Suitable for straight or curved tracks;
- Low headroom;
- Robust construction;
- Pre-lubricated ball bearings for excellent rolling features;
- Standard anti-tilt and wheel fracture support;
- The geared trolley is standard with 3m hand chain.

**OPTIONAL:**

- Other lengths of chain available upon request.

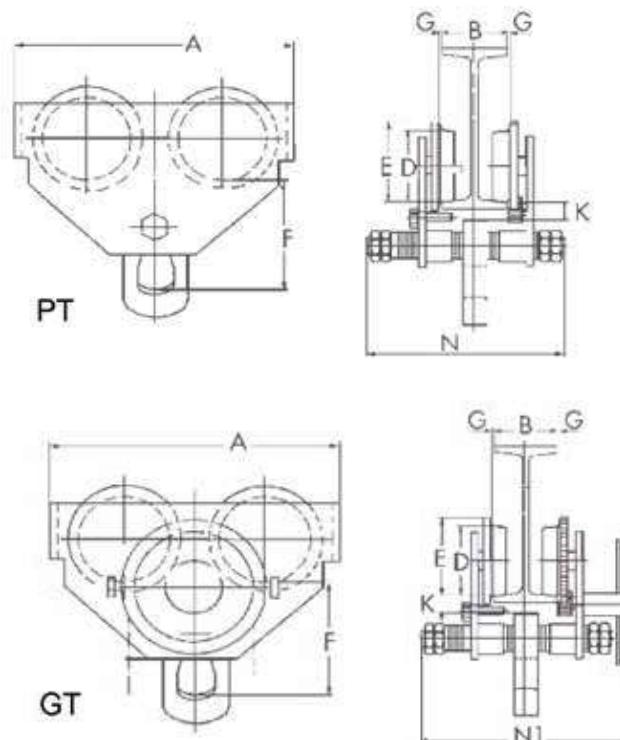

Product code	WLL (t)	Adjustable for beam width PT (B) (mm)	Adjustable for beam width GT (B) (mm)	Min. radius (m)	A (mm)	D (mm)	E (mm)	F (mm)	G (mm)	K (mm)	N (mm)	N1 (mm)	Weight PT (kg)	Weight GT (kg)
ELPT005 / ELGT005	0.5	50 - 203	64 - 203	0.8	199	55	67	105	2	30	295	326	7.0	14.5
ELPT010 / ELGT010	1.0	64 - 203	64 - 203	0.9	246	68	82	125	2	38	311	338	10.5	14.5
ELPT020 / ELGT020	2.0	88 - 203	88 - 203	1.0	276	80	94	150	2	38	327	349	17.5	21.5
ELPT030 / ELGT030	3.0	100 - 203	100 - 203	1.2	332	100	116	171	3	40	343	362	27.0	31.0
ELPT050 / ELGT050	5.0	114 - 203	114 - 203	1.3	377	110	127	196	3	42	355	374	41.0	46.0
ELPT100 / ELGT100	10.0	124 - 203	124 - 203	1.7	389	136	156	285	3	22	403	480	48.0	95.0



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY | EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511




## ELLER® PTL PUSH TROLLEY WITH LOW HEADROOM

These new robust push trolleys are easy adjustable for various beam widths by changing the spacers. The ELLER® push trolley PTL is available in WLL: 0.5, 1 en 2t. The following headrooms apply only when using an ELLER® PH2 / PH3 hand chain hoist.

### FEATURES:

- Adjustable for various beam widths by changing the spacers;
- Trolley can be installed at any point along the track;
- Suitable for straight or curved tracks;
- Low headroom;
- Robust construction;
- Pre-lubricated ball bearings for excellent rolling features;
- Standard anti-tilt and wheel fracture support.

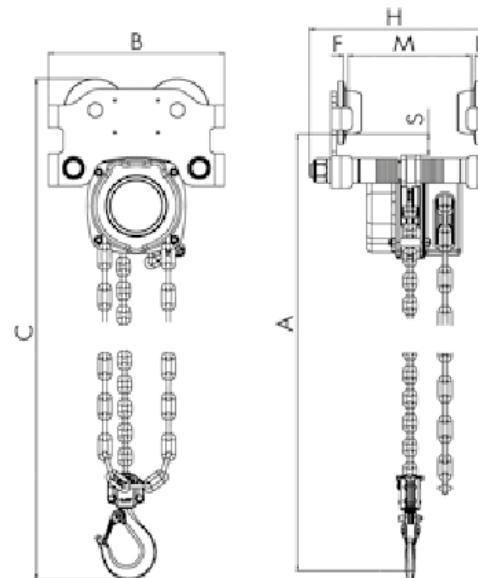

Product code	WLL (t)	Size H min (mm)	Size H max (mm)	Headroom (mm)	Beam width (mm)	A (mm)	B (mm)	C (mm)	F (mm)	H (mm)	M (mm)	S (mm)
ELPTL005	0.5	270	325	299	50 - 203	272	218	352	3	270	50 - 203	26
ELPTL010	1.0	281	336	331	64 - 203	270	260	420	3	281	64 - 203	29
ELPTL020	2.0	288	341	424	88 - 203	388	306	487	3	288	88 - 203	29



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLER® GTL GEARED TROLLEY WITH LOW HEADROOM

The ELLER® geared trolley GTL is available in WLL: 3, 5, en 10t.


These new trolleys are easy adjustable for various beam widths by changing the spacers. The following headrooms apply only when using an ELLER® PH2 / PH3 hand chain hoist.

### FEATURES:

- Adjustable for various beam widths by changing the spacers;
- Trolley can be installed at any point along the track;
- Suitable for straight or curved tracks;
- Low headroom;
- Robust construction;
- Pre-lubricated ball bearings for excellent rolling features;
- Standard anti-tilt and wheel fracture support;
- The geared trolley is standard with 3m hand chain.

### OPTIONAL:

- Other lengths of chain available upon request.

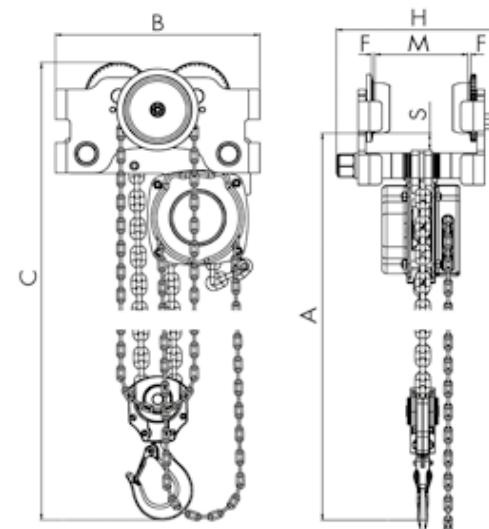

Product code	WLL (t)	Headroom (mm)	Beam width (mm)	A (mm)	B (mm)	C (mm)	F (mm)	H (mm)	M (mm)	S (mm)
ELGTL030	3	486	100 - 203	472	356	566	3	356	100 - 203	30
ELGTL050	5	636	114 - 203	595	440	745	3	369	114 - 203	37
ELGTL100	10	780	124 - 203	800	447	940	3	391	124 - 203	40



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLER® WIRE ROPE PULLING HOIST




**ELLER®** wire rope pulling hoists are lightweight and can be used at any angle.

### FEATURES:

- High-grade aluminum alloy housing;
- Safety pin breaks at 25% nuisance overload;
- The safety pin can be replaced under full load;
- Extra safety pin in handle;
- Standard with 20m wire rope.

### OPTIONAL:

- Other lengths available upon request.

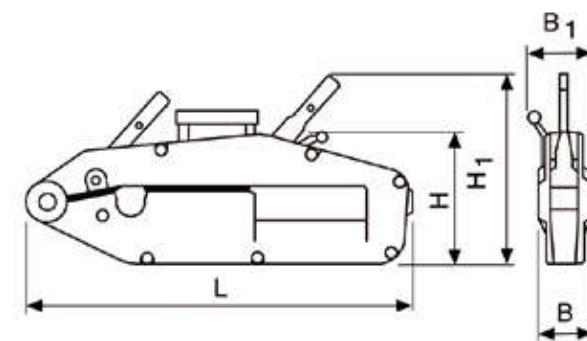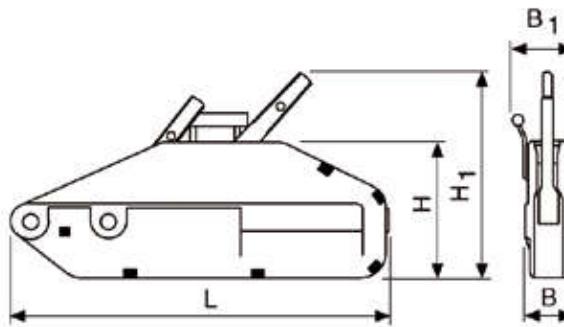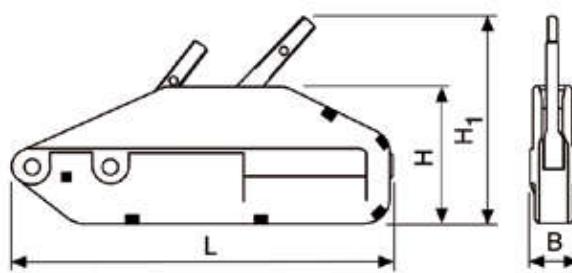

Product code	WLL (t)	Hand effort max. (kg)	Lever length (mm)	Wire rope Ø (mm)	Dimensions L x B x H (mm)	Weight, without wire rope (kg)
ELGP0800	0.8	32	740	8.3	426 x 64 x 235	6.4
ELGP1600	1.6	42	1.120	11.0	545 x 97 x 284	12.0
ELGP3200	3.2	44	1.120	16.0	660 x 116 x 325	23.0



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLERSLING WEBBING SLINGS AND ROUND SLINGS

**ELLERSLING** polyester webbing slings or round slings are used when materials like chain or wire rope could damage the load.

### FEATURES:

- Also available in black, from stock;
- Webbing slings according to EN 1492-1;
- Round slings according to EN 1492-2;
- Safety factor 7;
- Label in protective cover;
- Capacity printed on the sling;
- Computerized stitching;
- Double woven cover;
- Polyester;
- Webbing slings with reinforced loops;
- Sealed per piece with CE-declaration and manual;
- PU = amount of slings per box.



Working load limit table

Colour	Safe WLL with 1 webbing- or round sling				
	1	0,8	2	1,4	1
	Straight lift	Choked lift	Parallel	<sup>2</sup> = 0° - 45°	<sup>2</sup> = 45° - 60°
Indicated WLL (t)					
1	1	0,8	2	1,4	1
2	2	1,6	4	2,8	2
3	3	2,4	6	4,2	3
4	4	3,2	8	5,6	4
5	5	4	10	7	5
6	6	4,8	12	8,4	6
8	8	6,4	16	11,2	8
10	10	8	20	14	10

## SPECIALS | AVAILABLE ON REQUEST



Webbing sling endless



Webbing cover / PVC cover



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**ELLERsLING WEBBING SLINGS**

**When buying per PU there is a very interesting extra discount.**



Product code	WLL (t)	Length (m)	Colour	PU
ESLD030-01	1	1.0	Purple	50
ESLD030-01.5	1	1.5	Purple	40
ESLD030-02	1	2.0	Purple	35
ESLD030-03	1	3.0	Purple	25
ESLD030-04	1	4.0	Purple	25
ESLD030-05	1	5.0	Purple	20
ESLD030-06	1	6.0	Purple	15
ESLD030-08	1	8.0	Purple	10
ESLD060-01	2	1.0	Green	25
ESLD060-01.5	2	1.5	Green	25
ESLD060-02	2	2.0	Green	20
ESLD060-03	2	3.0	Green	17
ESLD060-04	2	4.0	Green	12
ESLD060-05	2	5.0	Green	10
ESLD060-06	2	6.0	Green	10
ESLD060-08	2	8.0	Green	8
ESLD090-01	3	1.0	Yellow	20
ESLD090-01.5	3	1.5	Yellow	16
ESLD090-02	3	2.0	Yellow	12
ESLD090-03	3	3.0	Yellow	10
ESLD090-04	3	4.0	Yellow	9
ESLD090-05	3	5.0	Yellow	8
ESLD090-06	3	6.0	Yellow	8
ESLD090-08	3	8.0	Yellow	5
ESLD120-01	4	1.0	Grey	10
ESLD120-02	4	2.0	Grey	10
ESLD120-03	4	3.0	Grey	8

Product code	WLL (t)	Length (m)	Colour	PU
ESLD120-04	4	4.0	Grey	5
ESLD120-05	4	5.0	Grey	4
ESLD120-06	4	6.0	Grey	4
ESLD120-08	4	8.0	Grey	-
ESLD150-02	5	2.0	Red	6
ESLD150-03	5	3.0	Red	5
ESLD150-04	5	4.0	Red	4
ESLD150-05	5	5.0	Red	4
ESLD150-06	5	6.0	Red	3
ESLD150-08	5	8.0	Red	-
ESLD180-02	6	2.0	Brown	8
ESLD180-03	6	3.0	Brown	6
ESLD180-04	6	4.0	Brown	4
ESLD180-05	6	5.0	Brown	4
ESLD180-06	6	6.0	Brown	3
ESLD180-08	6	8.0	Brown	-
ESLD240-02	8	2.0	Blue	-
ESLD240-03	8	3.0	Blue	-
ESLD240-04	8	4.0	Blue	-
ESLD240-05	8	5.0	Blue	-
ESLD240-06	8	6.0	Blue	-
ESLD240-08	8	8.0	Blue	-
ESLD300-03	10	3.0	Orange	-
ESLD300-04	10	4.0	Orange	-
ESLD300-05	10	5.0	Orange	-
ESLD300-06	10	6.0	Orange	-
ESLD300-08	10	8.0	Orange	-



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
 TEL: + 420 595 693 911  
 ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
 IČ: 25358511 DIČ: CZ25358511



**ELLERSLING ROUND SLINGS**

When buying per PU there is a very interesting extra discount.



Product code	WLL (t)	Working length (m)	Circumference (m)	Colour	PU
ESER01-01	1	0.5	1	Purple	60
ESER01-02	1	1.0	2	Purple	50
ESER01-03	1	1.5	3	Purple	45
ESER01-04	1	2.0	4	Purple	35
ESER01-05	1	2.5	5	Purple	25
ESER01-06	1	3.0	6	Purple	20
ESER01-08	1	4.0	8	Purple	15
ESER01-10	1	5.0	10	Purple	10
ESER02-01	2	0.5	1	Green	50
ESER02-02	2	1.0	2	Green	45
ESER02-03	2	1.5	3	Green	35
ESER02-04	2	2.0	4	Green	25
ESER02-05	2	2.5	5	Green	20
ESER02-06	2	3.0	6	Green	15
ESER02-08	2	4.0	8	Green	10
ESER02-10	2	5.0	10	Green	5
ESER03-01	3	0.5	1	Yellow	50
ESER03-02	3	1.0	2	Yellow	30
ESER03-03	3	1.5	3	Yellow	20
ESER03-04	3	2.0	4	Yellow	17
ESER03-05	3	2.5	5	Yellow	14
ESER03-06	3	3.0	6	Yellow	10
ESER03-08	3	4.0	8	Yellow	8
ESER03-10	3	5.0	10	Yellow	5
ESER04-02	4	1.0	2	Grey	25

Product code	WLL (t)	Working length (m)	Circumference (m)	Colour	PU
ESER04-03	4	1.5	3	Grey	20
ESER04-04	4	2.0	4	Grey	15
ESER04-05	4	2.5	5	Grey	10
ESER04-06	4	3.0	6	Grey	8
ESER04-08	4	4.0	8	Grey	6
ESER04-10	4	5.0	10	Grey	5
ESER05-02	5	1.0	2	Red	15
ESER05-03	5	1.5	3	Red	12
ESER05-04	5	2.0	4	Red	10
ESER05-05	5	2.5	5	Red	8
ESER05-06	5	3.0	6	Red	7
ESER05-08	5	4.0	8	Red	5
ESER05-10	5	5.0	10	Red	4
ESER06-02	6	1.0	2	Brown	15
ESER06-04	6	2.0	4	Brown	7
ESER06-06	6	3.0	6	Brown	6
ESER06-08	6	4.0	8	Brown	4
ESER06-10	6	5.0	10	Brown	-
ESER08-04	8	2.0	4	Blue	6
ESER08-06	8	3.0	6	Blue	5
ESER08-08	8	4.0	8	Blue	3
ESER10-04	10	2.0	4	Orange	-
ESER10-06	10	3.0	6	Orange	-
ESER10-08	10	4.0	8	Orange	-



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: +420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**ELLER® SOFT STEELS****FEATURES:**

- For extended temperature range, max. 150°C;
- According to EN 1492-2; 13414-1 and 13414-3;
- Round sling with steel wire rope instead of the normal polyamide lining;
- With BGV-C1 approval.

**OPTIONAL:**

- Other capacities and lengths available upon request;
- Printing or embroidery of company logo/name possible.



Product code	WLL according to BGV-C1 (10:1) (t)	WLL 5:1 (t)	Circumference (m)	Effective working length (m)	Box
ESER01-01SK	0.5	1	1	0.5	30
ESER01-02SK	0.5	1	2	1.0	30
ESER01-03SK	0.5	1	3	1.5	25
ESER01-04SK	0.5	1	4	2.0	15
ESER02-01SK	1.0	2	1	0.5	25
ESER02-02SK	1.0	2	2	1.0	20
ESER02-03SK	1.0	2	3	1.5	20
ESER02-04SK	1.0	2	4	2.0	10
ESER02-05SK	1.0	2	5	2.5	10
ESER02-06SK	1.0	2	6	3.0	10



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**ELLER® STEELS**

The ELLER® steels are according to EN 12385-4 and colour coding is referring to the length (ARGH).

**FEATURES:**

- Flexible wire rope slings;
- Available in WLL 1t (d=10mm) en 2t (d=14mm) with or without PVC tube;
- Ends with thimble and clamped with tapered talurit;
- Tapered talurit with inspection eye;
- The thimble is painted in a colour, indicating the length of the steel, this prevents searching and sorting;
- 1t version with oversized thimble fits a 3.25t bow shackle, 2t version fits a 4.75t bow shackle;
- Construction 6x19+FC and 6x36WS+FC;
- Tensile strength 1t: 64,7 kN / 2t: 127 kN;
- Other capacities, models and lengths are available on request.



Product code without PVC tube	Product code with PVC tube	Steel cable dia. (mm)	WLL (t)	Effective working length (m)	Colour
CTST1-0.5	CTST1-0.5P	10	1	0.5	Grey
CTST1-0.75	CTST1-0.75P	10	1	0.75	Orange
CTST1-01	CTST1-01P	10	1	1.0	Yellow
CTST1-01.5	CTST1-01.5P	10	1	1.5	Blue
CTST1-02	CTST1-02P	10	1	2.0	Green
CTST1-03	CTST1-03P	10	1	3.0	White
CTST1-04	CTST1-04P	10	1	4.0	Black
CTST1-05	CTST1-05P	10	1	5.0	Red
CTST1-06	CTST1-06P	10	1	6.0	Gold
CTST2-0.5	CTST2-0.5P	14	2	0.5	Grey
CTST2-01	CTST2-01P	14	2	1.0	Yellow
CTST2-01.5	CTST2-01.5P	14	2	1.5	Blue
CTST2-02	CTST2-02P	14	2	2.0	Green
CTST2-03	CTST2-03P	14	2	3.0	White
CTST2-04	CTST2-04P	14	2	4.0	Black
CTST2-05	CTST2-05P	14	2	5.0	Red
CTST2-06	CTST2-06P	14	2	6.0	Gold





The image shows a large truck trailer loaded with construction materials. The load includes several long, thin metal beams stacked vertically, some cardboard boxes, and other equipment. The materials are secured with a combination of black ratchet straps and orange buckle straps. The trailer is parked in front of a building under construction, with scaffolding visible in the background.

**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 4 20 5 95 6 93 9 11  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## ELLERSTRAP WITH RATCHET

### FEATURES:

- Made with double J hook (2-parts);
- Black lashing;
- According to EN 12195-2.

### OPTIONAL:

- Other capacities and lengths available upon request.;
- Printing on lashings and different colours available upon request.



Standard ratchet is black.

Product code	Length (m)	Lashing width (mm)	Lashing capacity (LC) stretched (daN)	Lashing capacity (LC) strapped (daN)	Tension force = 10% of the lashing capacity (daN)	Parts
ESR25L1-04	4	25	-	800	216	1
ESR25L1-05	5	25	-	800	216	1
ESR25L1-06	6	25	-	800	216	1
ESR35Z1-03	3	35	-	3.000	210	1
ESR35Z1-05	5	35	-	3.000	210	1
ESR50Z1-04	4	50	-	5.000	350	1
ESR50Z1-09	9	50	-	5.000	350	1
ESR25L2-03	3	25	400	800	216	2
ESR25L2-05	5	25	400	800	216	2
ESR25L2-08	8	25	400	800	216	2
ESR25Z2-04	4	25	750	1.500	225	2
ESR25Z2-05	5	25	750	1.500	225	2
ESR25Z2-06	6	25	750	1.500	225	2
ESR35Z2-04	4	35	1.500	3.000	210	2
ESR35Z2-05	5	35	1.500	3.000	210	2
ESR35Z2-08	8	35	1.500	3.000	210	2
ESR50Z2-05	5	50	2.500	5.000	350	2
ESR50Z2-08	8	50	2.500	5.000	350	2
ESR50Z2-09	9	50	2.500	5.000	350	2

Lashing capacity (LC) stretched (daN) does not apply to 1-part lashings.

## ELLERSTRAP WITH BUCKLE

### FEATURES:

- 1-part;
- Black lashing;
- Width 25mm.



### OPTIONAL:

- Other capacities and lengths available upon request.;
- Printing on lashings and different colours available upon request.

Product code	Length (m)	Lashing width (mm)
ESG25L1-01	1	25
ESG25L1-02	2	25
ESG25L1-03	3	25
ESG25L1-04	4	25
ESG25L1-05	5	25

## SPECIALS | AVAILABLE ON REQUEST



Euroclip - Double J hook - Claw hook



Ergo ratchet



Edge protectors



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511




**ELLER® LOAD BINDER GRADE 80****FEATURES:**


- According to EN 12195-2;
- Length of the lever (F) is 355mm;
- 2 shortening clutches, with security pin;
- Use BLP components for an optimal combination;
- Chain and hook not included.

**OPTIONAL:**

- Label.

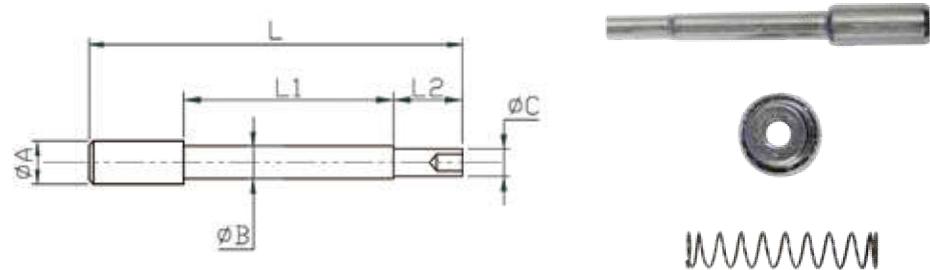**SAFETY PIN WITH SPRING AND NUT, AVAILABLE AS A SET**

Product code	Size (mm)	L	L1	L2	A	B	C
ELLB-08-PIN	8	1.83	0.92	0.37	0.25	0.177	0.157
ELLB-10-PIN	10	1.98	1.00	0.37	0.25	0.177	0.157
ELLB-13-PIN	13	2.52	1.30	0.37	0.25	0.177	0.157

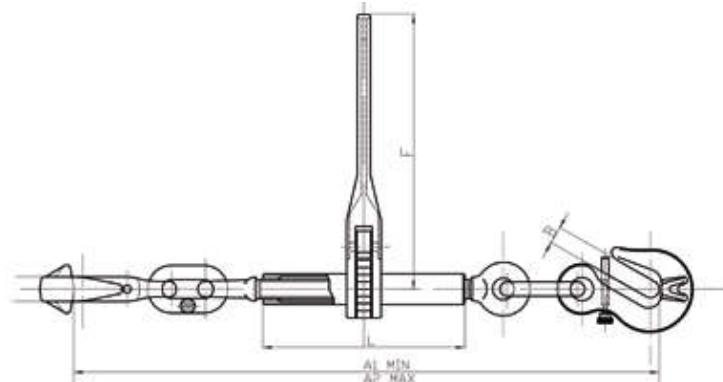

Product code	Stf values (daN)	Lashing capacity LC (daN)	Minimal tensile strength (daN)	Chain diameter (mm)	B (mm)	A1 min. (mm)	A2 max. (mm)	Weight (kg)
ELLB-08-08	3.150	4.000	8.040	8	11	584	744	4.97
ELLB-10-08	3.150	6.300	12.600	10	12	604	769	5.37
ELLB-13-08	3.150	10.00	21.200	13	15	702	852	5.37



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**BLP WORKING LOAD TABLE GRADE 100 PROGRAM**

The BLP chain program is a complete grade 100 line. One, or multiple leg chains can be made to order from stock. Most hooks are available with eye as well as clevis.

Safety factor	1-leg		2-legs			3- and 4-legs		Endless chain slings		Loop chains	
<b>4</b>											
Angle of inclination $\beta$	0°	0°	0°-45°	>0°-60°	0°-45°	>45°-60°	0°-45°	>45°-60°	-	0°-45°	>45°-60°
Load factor	1	0.8	1.4	1	1.12	0.8	2.1	1.5	1.6	1.4	2.1
WLL (t)											
$\varnothing$ 6 mm	1.40	1.12	2.00	1.40	1.60	1.12	3.00	2.12	2.24	1.96	2.94
$\varnothing$ 8 mm	2.50	2.00	3.55	2.50	2.80	2.00	5.30	3.75	4.00	3.50	5.25
$\varnothing$ 10 mm	4.00	3.20	5.60	4.00	4.50	3.20	8.40	6.00	6.40	5.60	8.40
$\varnothing$ 13 mm	6.70	5.36	9.40	6.70	7.50	5.36	14.00	10.00	10.72	9.38	14.07
$\varnothing$ 16 mm	10.00	8.00	14.00	10.00	11.20	8.00	21.00	15.00	16.00	14.00	21.00
$\varnothing$ 20 mm	16.00	12.80	22.40	16.00	17.90	12.80	33.60	24.00	25.60	22.40	33.60
$\varnothing$ 22 mm	19.00	15.30	26.50	19.00	21.30	15.20	40.00	28.00	30.40	26.60	39.90

**WLL IN (t) WITH EQUAL LOAD ON ALL LEGS**

If the chain slings are used in severe conditions (e.g. high temperature, assymmetrical load distribution, edge load, impact/shock loads) the maximum load capacity values in the the table must be reduced by the load factors below.

Temperature	-40° - +200°		+200° - +300°		+300° - +380°	
Load factor	1		0,9		0,75	
Assymetric load distribution						
Angle of inclination	0° - 45°	> 45° - 60°	0° - 45°	> 45° - 60°	0° - 45°	> 45° - 60°
Load factor	0.7	1	0.7	1	0.5	0.7
Edge load						
	R = Larger than 2x the chain diameter		R = Larger than the chain diameter		R = Smaller than the chain diameter	
Load factor	1		0.7		0.5	
Shock						
	Slight shocks		Medium shocks		Heavy shocks	
Load factor	1		0.7		Not allowed	


**PAVLÍNEK**  
 VÁZACÍ PROSTŘEDKY

 EMAIL: OBCHOD@PAVLINEK.CZ  
 TEL: +420 595 693 911  
 ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
 IČ: 25358511 DIČ: CZ25358511


## BLP CHAIN GRADE 100

Chain development is rapidly evolving. Grade 100 is quickly becoming the standard. With grade 100 you increase the capacity by 25%. The possibilities are almost unlimited en there is a wide variety of hooks and other components available. Our products meet the highest standards of quality and safety. This increases the safety in your work. Available in black or blue/green.



Clevis hook - chain - shortening clutch - connecting link - masterlink



Clevis hook - chain - connecting link - masterlink



Safety clevis hook - chain - shortening clutch - connecting link - masterlink



Safety clevis hook - chain - connecting link - masterlink



Safety swivel hook - connecting link - chain - shortening clutch - connecting link - masterlink



Safety swivel hook - connecting link - chain - connecting link - masterlink

You can assemble your own sling chain(s) (1 - 4 legs) on our website [www.lr.nl](http://www.lr.nl)

### 1-leg

#### Example product code

BLP-1-06-??-TOK???

BLP-1-08-??-TOK???

BLP-1-10-??-TOK???

BLP-1-13-??-TOK???

BLP-1-16-??-TOK???

### 2-legs

#### Example product code

BLP-2-06-??-TOK???

BLP-2-08-??-TOK???

BLP-2-10-??-TOK???

BLP-2-13-??-TVK???

BLP-2-16-??-TVK???

### 4-legs

#### Example product code

BLP-4-06-??-TOK???

BLP-4-08-??-TOK???

BLP-4-10-??-TOK???

BLP-4-13-??-TVK???

BLP-4-16-??-TVK???



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**BLP CHAIN GRADE 100**
**FEATURES:**

- According to EN 812-2 in quality grade 100;
- Maximum working temperature 380°C;
- Available from 6 to 22mm;
- Blue 6 - 22mm;
- Black (-Z) 6 - 13mm.



Product code	D (mm)	Pitch (mm)	Weight p/m (kg)
BLP-06x18 (-Z)	6	18	0.8
BLP-08x24 (-Z)	8	24	1.5
BLP-10x30 (-Z)	10	30	2.4
BLP-13x39 (-Z)	13	39	4.0
BLP-16x48	16	48	6.0
BLP-20x60	20	60	9.0
BLP-22x66	22	66	10.9


**BLP IDENTIFICATION LABEL**


Product code

BLP-LABEL


**BLP MLF MASTER LINK**
**FEATURES:**

- According to EN1677-4 with increased WLL;
- For 1- and 2-legs.

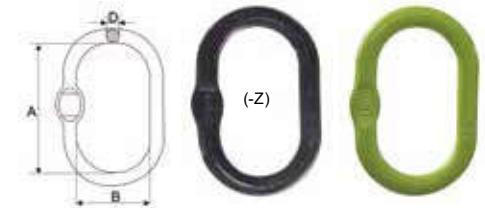


Product code	WLL (t)	D (mm)	A (mm)	B (mm)	Weight (kg)	Master link for chain Ø	
						1-leg (mm)	2-legs (mm)
BLP-MLF-13 (-Z)	2.3	13	110	60	0.3	6	6
BLP-MLF-16 (-Z)	3.5	16	110	60	0.5	8	-
BLP-MLF-18 (-Z)	5.0	18	135	75	0.9	10	8
BLP-MLF-22 (-Z)	7.6	23	160	90	1.6	13	10
BLP-MLF-26	10.0	27	180	100	2.5	16	13
BLP-MLF-32	14.0	33	200	110	4.1	-	16
BLP-MLF-36	25.1	38	260	140	6.2	20.2	20
BLP-MLF-45	30.8	45	340	180	12.9	-	22


**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

 EMAIL: OBCHOD@PAVLINEK.CZ  
 TEL: + 420 595 693 911  
 ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
 IČ: 25358511 DIČ: CZ25358511


**BLP MLY MASTER LINK****FEATURES:**


- According EN1677-4 with increased WLL;
- For 3- and 4-legs.



Product code	WLL 0° - 45° (t)	D x A x B (mm)	a x b x d (mm)	Weight (kg)	Masterlink for chain Ø (mm)
BLP-MLY-06	3.0	19 x 135 x 75	54 x 25 x 13	1.3	6
BLP-MLY-08	5.3	23 x 160 x 90	70 x 35 x 17	2.3	8
BLP-MLY-10	8.0	27 x 180 x 100	85 x 40 x 19	3.7	10
BLP-MLY-13	14.0	33 x 200 x 110	115 x 50 x 23	6.5	13
BLP-MLY-16	21.2	36 x 260 x 140	140 x 65 x 27	10.1	16
BLP-MLY-20	33.6	50 x 350 x 190	150 x 70 x 33	22.8	20
BLP-MLY-22	39.9	50 x 350 x 190	180 x 100 x 36	26.0	22

**BLP OML OMEGA LINK****FEATURES:**

- According to EN1677-1 with increased WLL.

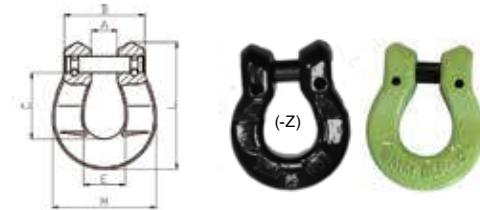

Product code	WLL (t)	A (mm)	B (mm)	C (mm)	E (mm)	M (mm)	L (mm)	Weight (kg)	Omega link for chain Ø (mm)
BLP-OML-06 (-Z)	1.4	8.5	32.5	39	20.0	44	55.0	0.1	6
BLP-OML-08 (-Z)	2.5	10.5	42.0	55	24.0	60	73.0	0.3	8
BLP-OML-10 (-Z)	4.0	12.5	48.5	66	31.0	70	90.0	0.4	10

**BLP CNL CONNECTING LINK****FEATURES:**

- According to EN1677-1 with increased WLL.



Product code	WLL (t)	H (mm)	A (mm)	K (mm)	L (mm)	Weight (kg)	Connecting link for chain Ø (mm)
BLP-CNL-06 (-Z)	1.4	7.0	14.0	44.5	60.0	0.1	6
BLP-CNL-08 (-Z)	2.5	10.0	18.5	61.5	82.5	0.2	8
BLP-CNL-10 (-Z)	4.0	12.6	23.0	72.0	97.2	0.5	10
BLP-CNL-13 (-Z)	6.7	16.5	28.0	92.0	125.0	1.2	13
BLP-CNL-16	10.0	20.0	33.5	107.0	147.0	1.7	16
BLP-CNL-20	16.0	25.0	42.0	122.0	172.0	2.7	20
BLP-CNL-22	19.0	27.0	48.0	136.0	191.0	4.0	22

**BLP CSH(N) CLEVIS HOOK WITH LATCH****FEATURES:**

- According to EN1677-2 with increased WLL.




Product code	WLL (t)	E (mm)	H (mm)	K (mm)	L (mm)	M (mm)	Weight (kg)
BLP-CSH-06 (-Z)	1.4	18.5	21.0	73	109.0	68.5	0.3
BLP-CSHN-08 (-Z)	2.5	28.5	22.0	98	137.0	82.0	0.6
BLP-CSHN-10 (-Z)	4.0	31.0	26.7	122	175.5	97.5	1.0
BLP-CSHN-13 (-Z)	6.7	40.0	36.0	137	202.0	135.0	1.8
BLP-CSH-16	10.0	44.0	50.0	161	248.0	160.5	3.6
BLP-CSH-20	16.0	52.0	56.0	197	297.0	190.5	7.0
BLP-CSH-22	19.0	66.0	62.0	214	326.0	214.5	12.1



**BLP ESH(N) EYE HOOK WITH LATCH**
**FEATURES:**


- According to EN1677-2 with increased WLL.

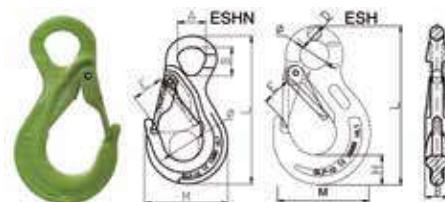

Product code	WLL (t)	D (mm)	E (mm)	H (mm)	L (mm)	M (mm)	$\emptyset$ (mm)	Weight (kg)
BLP-ESH-06	1.4	10.0	18.5	21.0	111	68.0	20.5	0.3
BLP-ESHN-08	2.5	11.0	28.5	22.0	145	82.0	28.0	0.4
BLP-ESHN-10	4.0	14.0	31.0	26.2	170	97.5	34.0	0.9
BLP-ESHN-13	6.7	18.5	40.0	36.0	206	135.0	43.0	1.8
BLP-ESH-16	10.0	24.5	46.0	50.0	260	162.0	50.0	3.5

**BLP CGH SHORTENING HOOK**
**FEATURES:**


- According to EN1677-3 with increased WLL.

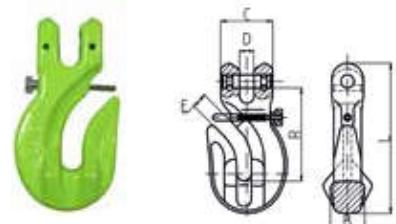

Product code	WLL (t)	B (mm)	C (mm)	D (mm)	E (mm)	L (mm)	R (mm)	Weight (kg)
BLP-CGH-08	2.5	25.0	38.0	10.0	10.5	109.0	66.0	0.6
BLP-CGH-10	4	32.0	46.0	12.0	12	134.0	82.0	1.2

**BLP CSK(S) SAFETY CLEVIS HOOK**
**FEATURES:**


- According to EN1677-3 with increased WLL;
- BLP-CSKS is more resistant to lateral tapping because of it's construction

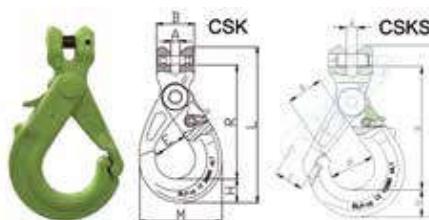

Product code	WLL (t)	A (mm)	B (mm)	E (mm)	H (mm)	L (mm)	K / R (mm)	$\emptyset$ (mm)	Weight (kg)
BLP-CSK-06	1.4	7.5	32.0	28.0	20.0	131.0	96.0	-	0.5
BLP-CSKS-08	2.5	9.5	37.5	35.0	21.0	165.0	118.0	45.0	0.8
BLP-CSKS-10	4.0	12.5	47.5	46.0	30.5	204.0	150.0	56.0	1.4
BLP-CSKS-13	6.7	15.0	52.0	56.0	39.0	244.0	176.0	64.0	2.6
BLP-CSKS-16	10.0	18.5	67.5	86.0	45.0	288.0	250.0	77.0	4.2
BLP-CSK-20	16.0	25.0	25.0	76.5	62.0	337.5	235.0	-	8.6
BLP-CSK-22	19.0	-	-	80.0	66.0	391.0	276.5	25.5	12.1

**BLP ESK(S) SAFETY EYE HOOK**
**FEATURES:**

- According to EN1677-3 with increased WLL;
- BLP-ESKS is more resistant to lateral tapping because of it's construction.

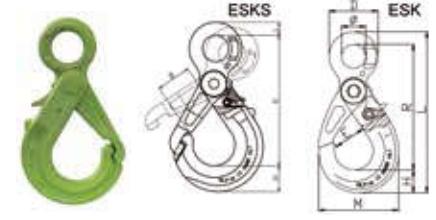

Product code	WLL (t)	E / B (mm)	H (mm)	R / K (mm)	$\emptyset$ (mm)	Weight (kg)
BLP-ESK-06	1.4	28.0	20.0	110	21.0	0.5
BLP-ESKS-08	2.5	37.5	22.0	138	27.0	0.8
BLP-ESKS-10	4.0	47.5	30.5	169	34.5	1.4
BLP-ESKS-13	6.7	52.0	39.0	205	40.0	2.6
BLP-ESKS-16	10.0	69.0	46.3	252	59.0	4.5



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY


EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: +420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



### BLP SSK(S) SAFETY SWIVEL HOOK

#### FEATURES:

- According to EN1677-3 with increased WLL;
- BLP-SSKS is more resistant to lateral tapping because of it's construction.



Product code	WLL (t)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)	L (mm)	K (mm)	Weight (kg)
BLP-SSK-06	1.4	32.5	23	11.5	28.0	20	184	152.0	0.6
BLP-SSKS-08	2.5	29.0	36	13.0	37.0	22	214	179.0	1.0
BLP-SSKS-10	4.0	39.0	42	15.5	47.5	30	264	219.0	1.9
BLP-SSKS-13	6.7	46.0	49	19.0	52.5	39	334	275.5	3.3
BLP-SSKS-16	10.0	69.0	62	23.0	70.0	46	400	323.0	5.9
BLP-SSK-20	16.0	72.0	62	26.0	76.5	62	463	375.0	12.5
BLP-SSK-22	19.0	97.0	97	33.0	80.0	66	572	473.0	17.1

### BLP STC SHORTENING CLUTCH



Product code	WLL (t)	For chain Ø (mm)	L (mm)	Weight (kg)
BLP-STC-06 (-Z)	1.4	6	73.5	0.2
BLP-STC-08 (-Z)	2.5	8	101.0	0.4
BLP-STC-10 (-Z)	4.0	10	138.0	1.0
BLP-STC-13 (-Z)	6.7	13	177.0	2.0
BLP-STC-16	10.0	16	220.0	3.3
BLP-STC-20	16.0	20	238.0	6.2
BLP-STC-22	19.0	22	295.0	8.5

### BLP CNL REPAIR KIT FOR CONNECTING LINK

#### FEATURES:

- Load pin;
- Retaining sleeve.



Product code	To be used for
BLP-RE-CNL-06	BLP-CNL-06
BLP-RE-CNL-08	BLP-CNL-08
BLP-RE-CNL-10	BLP-CNL-10
BLP-RE-CNL-13	BLP-CNL-13
BLP-RE-CNL-16	BLP-CNL-16
BLP-RE-CNL-20	BLP-CNL-20
BLP-RE-CNL-22	BLP-CNL-22

### BLP ESH/CSH SAFETY LATCH SET FOR ESH(N) EN CSH(N) HOOKS



Product code	To be used for
BLP-RE-ESH-CSH-06	ESH-06 / CSH-06
BLP-RE-ESHN-CSHN-08	ESHN-08 / CSHN-08
BLP-RE-ESHN-CSHN-10	ESHN-10 / CSHN-10
BLP-RE-ESHN-CSHN-13	ESHN-13 / CSHN-13
BLP-RE-ESH-CSH-16	ESH-16 / CSH-16
BLP-RE-ESH-CSH-20	ESH-20 / CSH-20
BLP-RE-ESH-CSH-22	ESH-22 / CSH-22



**BLP ESK(S) TRIGGER SET  
FOR ESK(S) / CSK(S) / SSK(S) HOOKS**


Product code	To be used for
BLP-RE-CSK-06	ESK-06 / CSK-06 / SSK-06
BLP-RE-CSKS-08	ESKS-08 / CSKS-08 / SSKS-08
BLP-RE-CSKS-10	ESKS-10 / CSKS-10 / SSKS-10
BLP-RE-CSKS-13	ESKS-13 / CSKS-13 / SSKS-13
BLP-RE-CSKS-16	ESKS-16 / CSKS-16 / SSKS-16
BLP-RE-CSK-20	CSK-20 / SSK-20
BLP-RE-CSK-22	CSK-22 / SSK-22

**BLP CSK(S) LOAD PIN / RETAINING PIN SET  
FOR CSK(S) HOOKS**


Product code	To be used for
BLP-LP-CSK-06	CSK-06
BLP-LP-CSKS-08	CSKS-08
BLP-LP-CSKS-10	CSKS-10
BLP-LP-CSKS-13	CSKS-13
BLP-LP-CSKS-16	CSKS-16
BLP-LP-CSK-20	CSK-20
BLP-LP-CSK-22	CSK-22

**BLP CSH(N) LOAD PIN / RETAINING PIN SET  
FOR CSH(N) HOOKS**


Product code	To be used for
BLP-LP-CSH-06	CSH-06
BLP-LP-CSHN-08	CSHN-08
BLP-LP-CSHN-10	CSHN-10
BLP-LP-CSHN-13	CSHN-13
BLP-LP-CSH-16	CSH-16
BLP-LP-CSH-20	CSH-20
BLP-LP-CSH-22	CSH-22

**BLP STC LOAD PIN / RETAINING PIN SET  
FOR STC SHORTENING CLUTCH**


Product code	To be used for
BLP-LP-STC-06	STC-06
BLP-LP-STC-08	STC-08
BLP-LP-STC-10	STC-10
BLP-LP-STC-13	STC-13
BLP-LP-STC-16	STC-16
BLP-LP-STC-20	STC-20
BLP-LP-STC-22	STC-22


**PAVLÍNEK**  
 VÁZACÍ PROSTŘEDKY

 EMAIL: OBCHOD@PAVLINEK.CZ  
 TEL: + 420 595 693 911  
 ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
 IČ: 25358511 DIČ: CZ25358511


## ELLERLIFT HAND PALLET TRUCK | AVAILABLE FROM STOCK

The ELLERLIFT hand pallet trucks are available in several capacities, widths and lengths. They are ideal for relocating pallets and also to transport multiple products on a pallet.

### FEATURES:

- Top quality hydraulic pump unit;
- Robust construction;
- Tapered fork tips with entry guide roller for easy entry and exit of pallets;
- Safe, controlled lowering speed;
- Ergonomically designed handle to prevent wrist strain;
- Wheel options: PU, nylon and rubber;
- Available in several types: standard, short and long;
- 1 year warranty on the pump units;
- According to EN 1757-2;
- Dimensions:  
 Steering wheel : ø 180x50mm  
 Load roller : ø 80x70mm  
 Minimum height : 85mm  
 Maximum lifting height : 190mm.



Product code	WLL (t)	Type	Fork width x length (mm)	Type steer wheel	Material steering wheels	Material load roller	Weight (kg)
EL25SNX-1150-TAPU	2.5	standard	540 x 1.150	tandem	PU	PU	70
EL25KN-0800-SIPU	2.5	extra short	540 x 800	single	PU	PU	61
EL20LN-2000-TAPU	2.0	extra long	540 x 2.000	tandem	PU	PU	126



SPECIALS | AVAILABLE ON REQUEST



Weighing pallet truck



Stainless steel truck



Galvanized truck



Mini truck



Lifting table



High platform truck



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511




## ELLER® STEEL JACKS

The ELLER® jacks are a robust piece of equipment for general application in construction, forestry, ship building etc. The steel jacks with safety or ratchet crank can be used anywhere as long as the claw fits under the load.

The ELLER® steel jacks are available in standard headroom with safety or ratchet crank. The steel jacks with low headroom can be perfectly used in confined spaces. For capacities from 1,5t to 10t.

### FEATURES:

- Robust construction for a long life span;
- Made with fixed toe (claw) and large stable footplate;
- Load can be lifted on the fixed toe and on the clawed head;
- Load is held securely in any position by the brake when the crank is not moved;
- Steel jack is standard with safety crank with collapsible handle;
- Only low effort is needed to jack up heavy loads;
- Ratchet crank with collapsible handle, also available separately;
- Equipped with two carrying handles;
- According to DIN 7355;
- 10t fitted with wheels.

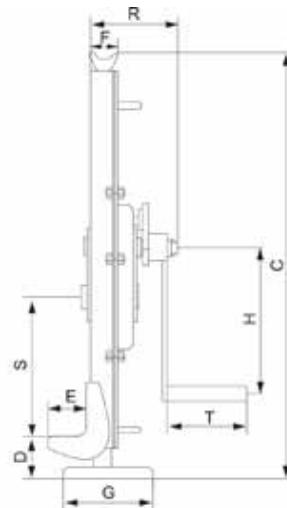

Product code	WLL (t)	Crank type	Stroke (mm)	Headroom type	Headroom (C) (mm)	Toe height (D) (mm)	Weight (kg)	A (mm)	B (mm)	E (mm)	F (mm)	G (mm)	H (mm)	K (mm)	R (mm)	S (mm)	T (mm)
ELDKS01500	1.5	Safety	350	Standard	725	60	17.0	82	155	60	49	130	225	147	128	280	113
ELDKS03000	3.0	Safety	355	Standard	735	70	20.0	83	130	60	45	138	249	170	140	235	128
ELDKS05000	5.0	Safety	345	Standard	730	80	28.5	108	140	71	68	170	275	190	155	217	128
ELDKS10000	10.0	Safety	390	Standard	800	100	46.5	124	140	86	76	170	300	252	185	187	250
ELDKK01500	1.5	Ratel	300	Short	600	60	14.0	81	100	55	46	110	225	147	119	175	113



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511




## ELLER® MACHINERY JACK

The ELLER® machinery jack is used for repairs, maintenance and installation of heavy machines.

### FEATURES:

- Compact and stable construction;
- Usable in any stable position;
- Housing revolves 360°;
- Adjustable lowering speed;
- With overload protection;
- With removable lever for even better mobility.



Product code	WLL (t)	Lifting range head (mm)	Lifting range toe (mm)	Effort pump lever (kg)	Weight (kg)
ELPM050	5	368-573	25-230	38	25
ELPM100	10	420-650	30-260	40	35
ELPM250	25	505-720	58-273	40	102

## ELLER® TOE JACK

The ELLER® hydraulic toe jack.

### FEATURES:

- Very low toe height;
- Adjustable toe;
- Robust steel construction;
- With overload protection;
- Handgrip for easy handling.



Product code	WLL head (t)	WLL toe (t)	Stroke (mm)	Lifting range head (mm)	Lifting range toe (mm)	Claw height (mm)	Weight (kg)
ELTG-30	3	3	140	244-384	15-155	15	23
ELTG-80	10	8	140	269-409	20-160	20	30



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: +420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511




## ELLER® KJ MECHANICAL JACK

The ELLERjack mechanical jack is suitable for bridge, tank and structural steel erectors; presses, shipbuilding and all industries where powerful, all-position jacks are required. The jack can keep the load steady for an indefinite amount of time. The maintenance on the jacks is almost negligible.

### SPECIFICATIE:

- Robust construction and dust and dirt-proof malleable iron housings;
- Lightweight and a low building height;
- Cap, gear and base are heat-treated, alloy steel forgings;
- Ratchet mechanism is fully enclosed.

Product code	WLL (t)	Stroke (mm)	Min. height (mm)	Ram Ø (mm)	Base Ø (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Weight (kg)
ELKJ06100	6	100	200	48	88	59	103	65	120	75	6
ELKJ10150	10	150	280	58	108	80	120	82	148	108	13
ELKJ15050	15	50	180	68	113	84	127	82	148	100	11
ELKJ15125	15	125	255	68	113	84	127	82	148	105	12
ELKJ15150	15	150	280	68	113	84	127	82	148	104	13
ELKJ15250	15	250	380	68	113	84	127	82	148	100	17
ELKJ15300	15	300	440	68	113	84	127	82	148	106	19
ELKJ25050	25	50	180	78	128	90	139	100	175	110	13
ELKJ25125	25	125	255	78	128	99	139	100	166	107	16
ELKJ25250	25	250	400	78	128	99	139	100	166	107	24
ELKJ25330	25	330	485	78	128	99	139	100	166	110	25
ELKJ30200	30	200	350	94	148	99	161	114	180	126	25
ELKJ35130	35	130	280	94	147	99	161	114	180	122	24
ELKJ35250	35	250	400	94	147	106	161	119	209	134	32
ELKJ35400	35	400	625	94	147	106	161	119	209	132	43
ELKJ50130	50	130	290	106	166	109	183	125	215	140	32
ELKJ50250	50	250	445	106	166	109	183	125	215	143	44
ELKJ50400	50	400	675	106	166	109	183	125	215	139	63
ELKJ100250	100	250	560	148	298	275	313	306	383	157	175

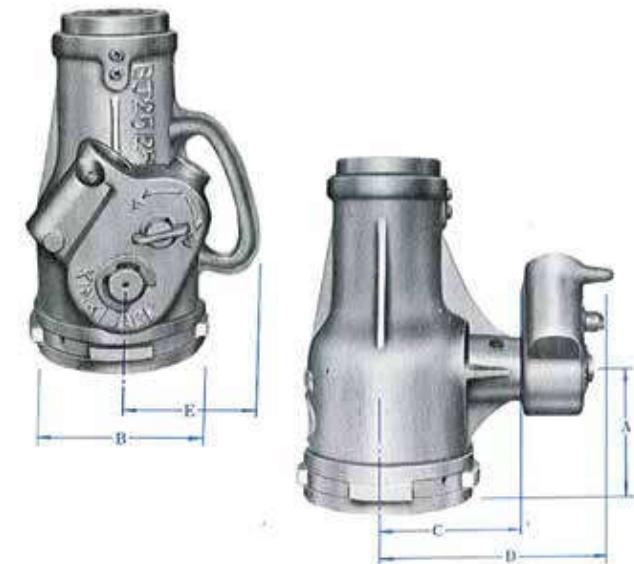

**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: +420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



**ELLER® BJ HYDRAULIC JACK****FEATURES:**

- Firm foot plate for a compact and stable construction;
- The piston is provided with a screw spindle which makes it easy to adjust the minimum height, up to 20;
- The piston has an overload safety device;
- The hydraulic jack can be used in temperatures from -5°C to +45°C;
- Not suitable for horizontal forces.



Product code	WLL (t)	Minimum height (mm)	Maximum height (mm)	Wind-out height (mm)	Weight (kg)
ELBJ020	2	158	248	90	2.5
ELBJ030	3	195	320	125	3.5
ELBJ050	5	197	322	125	4.5
ELBJ080	8	205	330	125	7.5
ELBJ120	12	214	339	125	7.5
ELBJ150	15	225	365	140	8.5
ELBJ200	20	244	389	145	12.0
ELBJ320	32	295	445	150	16.0
ELBJ500	50	310	495	185	33.0



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: OBCHOD@PAVLINEK.CZ  
TEL: +420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511





## ELLER® FOLDABLE SHOP CRANE

The ELLER® shop crane is easy to operate, quickly folded and fitted with an adjustable lever for 3 positions.

### FEATURES:

- Robust construction;
- Hard-chrome cylinder;
- Safety valve against overload;
- Forged swivel loader hook (not under load);
- Quick lift through unique double acting cylinder;
- 360° swivel steering wheels with brake;
- Color may differ from examples shown below.

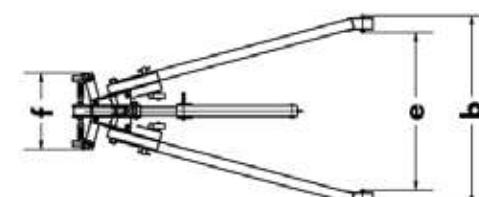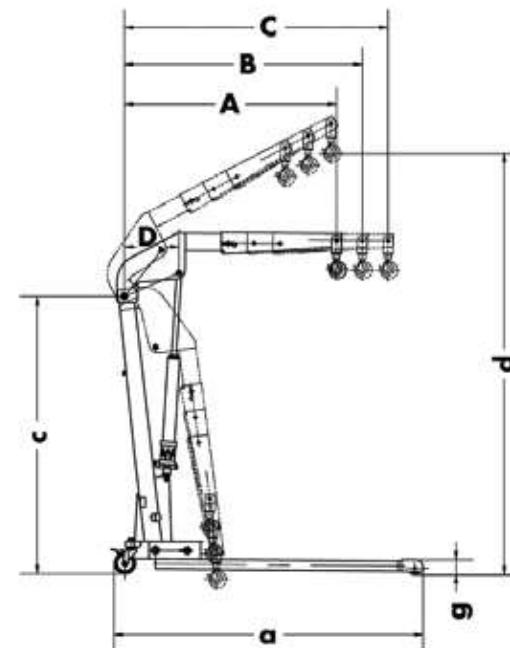

Product code	WLL A (t)	WLL B (t)	WLL C (t)	a (mm)	b (mm)	c (mm)	d max. (mm)	D (mm)	e (mm)	f (mm)	g (mm)	h (mm)	Weight (kg)
ELWK-1000	1.0	0.8	0.7	1.710	1.120	1.590	2.510	380	925	430	80	1.980	112
ELWK-2000	2.0	1.7	1.5	1.910	1.150	1.630	2.700	380	965	560	205	1.910	160



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 4 2 0 5 9 5 6 9 3 9 1 1  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511



## TERMS OF SALE AND DELIVERY

### IN THE NETHERLANDS

The general terms and conditions for the technology industry, as most recently filed by the Association FME-CWM at the District Court or The Hague, apply to all our offers and agreements. A copy or these terms and conditions is available on our website [www.lr.nl/downloads](http://www.lr.nl/downloads) or [www.fme.nl](http://www.fme.nl). Other terms and conditions are expressly rejected. From the time of shipment all supplies and materials travel, unless agreed otherwise, at the risk of the buyer, respectively the consumer.

### OUTSIDE THE NETHERLANDS

The general conditions for the supply of mechanical, electrical and electronic products, as lately published by ORGALIME, apply to all our offers and agreements. A copy or these terms and conditions is available on our website [www.lr.nl/downloads](http://www.lr.nl/downloads) or on [www.orgalime.org](http://www.orgalime.org). Other terms and conditions are expressly rejected. From the time of shipment all supplies and materials travel, unless agreed otherwise, at the risk of the buyer, respectively the consumer.

### PRICES

All our prices are excl. VAT.

### FREIGHT COSTS WITHIN THE NETHERLANDS

Orders above € 600,- net: free house delivery.

Orders between € 125,- and € 600,- net: freight bill.

Orders under € 125,- net: freight on account and € 12,50 - handling cost.

The handling cost of € 12,50 will not be charged for orders placed through our customer portal on our website.

Deliveries are made in a manner to be determined by Louis Reyners BV. Additional costs arising from a shipping method especially required by the customer, will be passed on.

### FREIGHT COSTS, OUTSIDE THE NETHERLANDS

EXW, Zaandam.

### CLAIMS

Within eight days or receipt of the goods. We can only accept returned goods after prior consultation. Returns without our return number we can unfortunately not accept. To returns charges apply. For more information, see our website [www.lr.nl](http://www.lr.nl).

### IMPORTANT SAFETY ASPECT

Always read the supplied operating and installation instructions.

### PACKAGING

Included, unless stated otherwise.

### PAYMENT CONDITION

To be agreed on during quotation.

### COPYRIGHT

All rights to the materials and information in this catalogue are owned by Louis Reyners BV. No further publication or commercial use may be made of the materials and information in this catalogue without the express permission of Louis Reyners BV.

### CHANGES

Price and product changes with reservation.

### WEBSITE

See our website, [www.lr.nl](http://www.lr.nl), for our complete range of products with the latest information and current prices.



**PAVLÍNEK**  
VÁZACÍ PROSTŘEDKY

EMAIL: [OBCHOD@PAVLINEK.CZ](mailto:OBCHOD@PAVLINEK.CZ)  
TEL: + 420 595 693 911  
ŠALOUNOVA 746/31, OSTRAVA VÍTKOVICE  
IČ: 25358511 DIČ: CZ25358511

